

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid CMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL	Attorney Docket No.	99-129	Total Pages	27
	First Named Inventor or Application Identifier			
	Ivanescu et al.			
	Express Mail Label No. EE096002310US			
(Only for new nonprovisional application under 37 CFR 1.53(b))				
Application Elements See MPEP chapter 600 concerning utility patent application contents.		ADDRESS TO: Assistant Commissioner for Patent Box Patent Application Washington, D.C. 20231		
1. <input checked="" type="checkbox"/> Fee Transmittal Form [Total Pages 1] (Submit an original, and a duplicate for fee processing)		6. <input type="checkbox"/> Microfiche Computer Program (Appendix)		
2. <input checked="" type="checkbox"/> Specification [Total Pages 18- including cover sheet] (preferred arrangement set forth below) -Descriptive title of the invention -Cross References to Related Applications -Statement Regarding Fed sponsored R&D -Reference to Microfiche Appendix -Background of the Invention -Brief Summary of the Invention -Brief Description of the Drawings (if filed) -Detailed Description -Claim(s) -Abstract of the Disclosure		7. Nucleotide and/or Amino Acid Sequence Submission (If applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies		
3. <input checked="" type="checkbox"/> Drawings(s) (35 USC 113) [Total Sheets 4]		ACCOMPANY APPLICATION PARTS		
4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 2] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) (Note Box 5 below) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting Inventor(s) named in the prior application See 37 CFR 1.63(d)(2) and 1.33(b).				
5. <input type="checkbox"/> Incorporation By Reference useable if Box 4b is Checked) The entire disclosure of the prior Application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by references therein.		8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) [Total Pages]		
		9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee <input type="checkbox"/> Power of Attorney		
		10. <input type="checkbox"/> English Translation Document (if applicable)		
		11. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Total Pages 1] <input checked="" type="checkbox"/> Copies of IDS Citations		
		12. <input type="checkbox"/> Preliminary Amendment		
		13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)		
		14. <input type="checkbox"/> Small Entity <input type="checkbox"/> Statement filed in prior application, Statement(s) Status still proper and desired		
		15. <input type="checkbox"/> Certified Copy of Priority Document(s)		
		16. <input type="checkbox"/> Other: _____		
17. If a CONTINUING APPLICATION, Check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No.: _____ / _____				
18. CORRESPONDENCE ADDRESS				
<input type="checkbox"/> Customer Number or Bar Code Label or <input checked="" type="checkbox"/> Correspondence address below (Insert Customer No. or Attach bar code label here)				
NAME	Marc Lorelli			
ADDRESS	DaimlerChrysler Intellectual Capital Corporation			
	CIMS 483-02-19			
	800 Chrysler Drive East			
CITY	Auburn Hills	STATE	Michigan	ZIP CODE
				48326-2757
COUNTRY	United States	TELEPHONE	(248) 576-5294	FAX
				(248) 576-7905

LIGHT-OFF AND CLOSE COUPLED CATALYST

5

BACKGROUND OF THE INVENTION

1. Technical Field

10 The present invention relates in general to a motor vehicle exhaust system. More particularly, the present invention relates to a catalytic exhaust treatment in a motor vehicle. More specifically, but without restriction to the particular embodiment and/or use which is shown and described for purposes of illustration, the present invention relates to an exhaust system having a series of catalytic converters disposed near the exhaust port of an internal combustion
15 engine.

2. Discussion

Many years ago, the exhaust systems of automobiles consisted entirely of a pipe that attached to the exhaust ports of the combustion chamber of an
20 internal combustion engine via a manifold. The major function of the pipe was to allow a controlled path for the hot exhaust gases to flow away from the engine and passenger compartments of the vehicle. Subsequently, mufflers were added to the rearward portion of the exhaust pipe to muffle the pulsating sounds of the exhaust gases to an acceptable level. In the mid 1970's, a typical exhaust
25 system also included a catalytic converter to remove pollutants from the exhaust gases. At first, all catalytic converters were disposed a substantial distance downstream of the exhaust ports in order to more effectively control the temperature of the catalyst.

Traditional 3-way, Carbon Monoxide-Hydrocarbon-Nitric Oxide, catalysts that are used on automobiles may not operate effectively at low or very high temperatures. At low temperatures, the catalyst does not convert the three main pollutants to Carbon Dioxide, Water, Nitrogen, and Oxygen. In fact, the typical catalyst is wholly ineffective until the catalyst heats up. The time needed for the catalyst to heat up is directly proportional to the distance between the catalyst and the engine. This is due primarily to the amount of structure (pipe walls, etc.) that the exhaust gases come in contact with before the catalyst. These surfaces act as a thermal mass and, in effect, reduce the temperature of the exhaust gas as it moves downstream. In a downstream position, a typical catalyst could take as much as two minutes to heat up to an effective operating temperature. Therefore, the majority of the pollutants that the engine produces in the first two minutes would pass through the catalyst and emitted to the atmosphere. Unfortunately, if a catalyst operates at a temperature above a defined maximum, the catalyst will tend to age faster or even melt, thereby making it necessary to change catalysts. Therefore, placing the catalyst in the downstream position, significantly away from the exhaust ports, was a necessity.

Automotive engineers saw the need to provide catalysts that could heat up quicker and many improvements followed over the years, such as low mass substrates and close coupled catalysts. The low mass substrates provided for minimal thermal loss caused by the catalyst, thereby decreasing the needed heat-up time. Close coupled catalysts are, by definition, closer to the engine, and consequently, closer to the heat source. The improvements made to catalyst systems over the years have allowed for the catalyst to be placed closer

to the exhaust port without being in danger of over-heating the catalyst.

Examples of close coupled systems are described in U.S. Patent Nos. 5,351,483 and 4,151,717. Many other systems have been proposed to decrease heat up time for the catalyst system, such as adding a heating element to the catalyst.

5 However, such a solution has not been effective compared to the close coupled catalyst when cost and performance are considered.

10 The desire to reduce heat up time for an automotive catalyst has created a need to provide unique placement and arrangements of catalysts that effectively promote conversion of pollutants, especially in the first few minutes of engine operation.

SUMMARY OF THE INVENTION

15 Accordingly, it is a principal objective of the present invention to provide an effective catalyst configuration and arrangement for a motor vehicle.

It is another objective of the present invention to provide a catalyst configuration that reduces the amount of pollutants that escape through the exhaust system.

20

It is yet another objective of the present invention to provide a catalyst configuration that can reduce the amount of time needed for catalyst 'light-off' to occur, i.e. the time needed to heat the catalyst to an appropriate operating temperature.

It is a further objective of the present invention to provide a catalyst configuration that can be packaged effectively in the engine compartment without affecting other components.

5 In one form, the present invention provides a catalyst configuration for a motor vehicle having an engine with a plurality of exhaust ports that carry exhaust gases from the combustion chamber of the engine. The exhaust gases leave the combustion chamber and flow in a downstream direction by first entering the exhaust ports. The exhaust gas from the exhaust ports then enters
10 a plurality of tubes extending from a shell, the shell also includes an exit portion that decreases in diameter in the downstream direction. Each tube includes a conically shaped catalyst disposed adjacent to the exhaust port. The conically shaped catalysts have a front face and a rear face, said rear face being larger than said front face. The conically shaped catalysts also include cells that vary in
15 size, the cell size increases in the downstream direction. The conically shaped catalysts are constructed from a metal substrate.

The shell encloses a main brick catalyst. The main catalyst is substantially cylindrical in shape and disposed downstream from the plurality of
20 conically shaped catalysts. The main brick catalyst includes an angled front face and a conical downstream end. The downstream end has a conically shaped formation that decreases in diameter in the downstream direction at a rate greater than the rate at which the exit portion of the shell decreases in the downstream direction. The main catalyst brick is preferably constructed of a

ceramic substrate. An exhaust pipe is attached to the exit portion of the shell and extends substantially to the rear of the vehicle.

Additional benefits and advantages of the present invention will become
5 apparent to those skilled in the art to which this invention relates from a reading
of the subsequent description of the preferred embodiment and the appended
claims, taken in conjunction with the accompanying drawings.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

The drawings, which form an integral part of the specification, are to be
read in conjunction therewith, and like reference numerals are employed to
designate identical components in various views:

15 Figure 1 is a side view of the catalyst system of the present invention, in a
six cylinder V-configuration engine;

 Figure 2 is a side view of the catalyst system of the present invention
having a portion of the shell removed for illustration purposes;

20 Figure 3 is a cross-sectional view of the catalyst system of the present
invention along the line 3-3 of Figure 1; and

 Figure 4 is a cross sectional view of a second embodiment of the catalyst
system of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, there is depicted a catalyst system illustrating the present invention. With reference to Figure 1, the catalyst system of the present invention is designated generally by numeral 100. Catalyst system 100 is shown attached to an engine 102 at exhaust ports 104. The exhaust ports 104 of engine 102 are employed to allow hot gases to be expelled out of the combustion chamber of the engine. Catalyst system 100 includes a shell 106 enclosing the main portion of the catalytic elements. A plurality of hollow tubes 108 extend from the shell 106 and attach to the engine 102, preferably via bolts 110. The tubes 108 attach to the engine 102 at the exhaust ports 104 such that the tubes 108 circumscribe the exhaust ports 104 so that all fluids that exit the exhaust ports 104 enter the tubes 108. It should be appreciated that the number of tubes 108 correspond to the number of exhaust ports 104 in one region of the engine 102. For example, the engine 102 of Figure 1 includes six exhaust ports, however, only three exhaust ports 104 are visible. The other three exhaust ports are disposed on the other side of the engine 102 and lead into another set of tubes, that are, again not shown because their illustration is blocked by the engine 102. It should be appreciated that the orientations on both sides of the engine 102 are substantially identical so only one will be described subsequently in detail.

The shell 106 includes an exit portion 112 disposed at the downstream end 114 thereof. The exit portion 112 leads to an exhaust pipe 116 that runs longitudinally with the vehicle and preferably exits near the back end thereof. Figure 2 illustrates the catalyst system 100 with the engine 102 removed from

illustration. Figure 2 also includes a portion of the shell 106 cut away so that a section of the internals thereof can be illustrated. The tubes 108 of the preferred embodiment shown in Figure 2 can be more particularly identified as forward-most 200, medial 202, and rearward-most 204. Each tube 200, 202, and 204 includes a conically shaped catalyst inserted therein. The forward-most tube 200 includes a forward-most conical catalyst 210, the medial tube 202 includes a medial conical catalyst 212, and the rearward-most tube 204 includes a rearward-most conical catalyst 214. The specific shape and orientation of the catalyst 210, 212, and 214 shall be discussed subsequently in detail. Shell 106 houses a main catalyst brick 220 which extends substantially to the exhaust pipe 116.

Now turning to Figure 3, a first embodiment of the present invention is illustrated by a cross sectional view of the catalyst system 100. The three exhaust ports 104 are depicted with more particularity by numerals 300 for the forward-most port, 302 for the medial port, and 304 for the rearward-most port. Tubes 200, 202, and 204 include a flange 306 at their upstream end for mating reception of the bolts 110. For the sake of illustration, up-stream will be considered as a location that is more closely situated to the exhaust ports 104 of the engine 102. The conical shape of the conical catalysts 210, 212, and 214 can be more fully appreciated from the cross sectional view of Figure 3. Most typical automotive catalysts consist of a substrate, typically ceramic or metallic that is coated with precious metals that lower the activation energy of at least one of the following reactions: the oxidation of hydrocarbons, the oxidation of carbon monoxide, and the reduction of nitric oxides. Most automotive catalysts are

loaded with some combination of Platinum, Palladium, and Rhodium depending on the specific application. The substrate, whether it be metallic or ceramic, has cells or flow passages formed therethrough. In a standard catalyst, each cell maintains a constant cross section throughout the catalyst. The size of the cell is defined as the cross sectional area of each passageway defined in a direction perpendicular to exhaust gas flow. The conical catalysts 210, 212, and 214 are preferably constructed from a metallic substrate. Metallic substrates are capable of varying the size of the cell depending on the construction method thereof. Therefore, for example, conical catalyst 210 includes a front face 308 having a defined surface area and a defined number of cells. The cell size is therefore calculated by dividing the surface area by the number of cells. At the rear face 310 of the conical catalyst 210 the surface area increases but the number of cells remains constant, thereby increasing the cell size or cell cross sectional area at the rear face 310. The greater the cells per square inch the greater the surface area available for which catalytic material can be bonded. Therefore, providing a conically shaped catalyst allows for more catalytic conversion at the front face 308 of conical catalyst 210. This allows for a quicker light-off not only because catalyst is extremely close to the heat source but also because the exhaust gases are concentrated onto a small front face 308 of the conical catalyst 210.

The rear face 310 of the conical catalyst is disposed within an open chamber 312 within the shell 106. The chamber 312 promotes mixing and thermal equilibrium. The exhaust gas flow from the rear face 310 is directed towards the main catalyst brick 220. The main catalyst brick is, preferably, generally cylindrical in shape and having an angled front face 314. The brick is

surrounding on its exterior surfaces by a conventional mat 315 that is disposed between the brick 220 and the shell 106. Front face 314 is angled such that the front face 314 is closer to the rearward-most catalyst 212 than it is to the forward-most catalyst 208. It should be appreciated that the angled front face 314 and the portion of the shell that is adjacent to the tubes 108 form an angle referred to as 'A' in Figure 3. In this embodiment, the angle chosen is 18 degrees, this amount provides benefits both in catalyst packaging and exhaust gas mixing. The main catalyst brick 220 is preferably constructed from a ceramic substrate having a constant cell size. It should be appreciated that the cells are oriented in the direction of flow indicated by arrow 320 and that the cells maintain a constant cross sectional area throughout the brick. Cross sectional area is defined perpendicular to the longitudinal flow path. Towards the downstream portion of the main catalyst brick 220 a conical portion 322 is formed. The conical portion 322 has a middle section 324 that extends downstream further than the side sections 326. The side sections 326 are angled inward at a greater degree than the degree by which the exit portion 112 of the shell 106 is angled inward, thereby providing an area 327 that increases in the downstream direction. It should be appreciated that the middle section 324 has an exit surface 328 that is perpendicular to the exhaust gas flow of the system and is slightly smaller in diameter 332 than the exit pipe 116 whose diameter is referenced by numeral 330.

Figure 4 illustrates a second embodiment of the present invention. The general construction is somewhat similar to that described in detail in the first embodiment, therefore, only the differences will be described in detail. The main

665160" 699660

catalyst brick 220 in the second embodiment includes a plurality of angled surfaces 400, 402, and 404 at its upstream end. The number of angled surfaces corresponds to the number of exhaust ports 104 of the engine 102 in that particular region or side of the engine 102. Each angled surface 400, 402, and 404 is substantially parallel with the rear surface 310 of the conical catalysts 210, 212, and 214. The main catalyst brick 220 include surfaces that are parallel with the flow of exhaust gases 320 that interconnect the angled surfaces. Surface 406 interconnects angled surface 400 and 402 and surface 408 interconnects angled surface 402 and 404. Surfaces 406 and 408 include a flow restrictor 410 extending therefrom and abutting the shell 106 between the tubes 108. Flow restrictors 410 limit mixing within open chamber 312 and direct the exhaust gas flow from the conical catalysts 210, 212, and 214 to the main catalyst brick 220.

While the above description constitutes the preferred embodiment of the invention, it will be appreciated that the invention is susceptible to modification, variation, and change without departing from the proper scope or fair meaning of the accompanying claims.

What is claimed is:

1. A catalyst system for a motor vehicle having an engine with an exhaust port that carries exhaust gases away from the combustion chamber of the engine, the exhaust gases leave the combustion chamber and flow in a downstream direction by first entering the exhaust port, said catalyst system comprising:
 - a conically shaped catalyst;
 - a main brick catalyst having an angled front face disposed downstream of said conically shaped catalyst.
2. The catalyst system as set forth in claim 1, wherein said conically shaped catalyst is disposed adjacent to the exhaust port of the engine.
3. The catalyst system as set forth in claim 2, wherein said conically shaped catalyst includes a rear face disposed at an angle from said angled front face of said main brick catalyst.
4. The catalyst system as set forth in claim 3, wherein said angle between said rear face of said conically shaped catalyst and said angled front face of said main brick catalyst is acute.
5. The catalyst system as set forth in claim 4, wherein said conically shaped catalyst includes cells having a cross sectional area, said cross sectional area of at least one of said cells of said conically shaped catalyst increases in the downstream direction.

6. The catalyst system as set forth in claim 5, wherein said conically shaped catalyst includes a metallic substrate.

5 7. The catalyst system as set forth in claim 5, wherein said main catalyst brick includes cells of a constant cross sectional area.

8. The catalyst system as set forth in claim 7, wherein said main brick catalyst includes a ceramic substrate.

10

9. The catalyst system as set forth in claim 5, further comprising a shell enclosing said main brick catalyst and having a downstream end, said shell includes an exit portion having a diameter formed on said downstream end thereof, said exit portion decreases in diameter in the downstream direction.

15

10. The catalyst system as set forth in claim 9, wherein said main brick catalyst includes a downstream end having a conically shaped formation having a diameter, said diameter of said conically shaped formation decreases in the downstream direction at a rate greater than the rate at which said exit portion of said shell decreases in diameter in the downstream direction.

20

25

11. A catalyst system for a motor vehicle having an engine with a plurality of exhaust ports that carry exhaust gases away from the combustion chamber of the engine, the exhaust gases leave the combustion chamber and flow in a downstream direction by first entering the exhaust ports, said catalyst system comprising:

a plurality of conically shaped catalysts disposed adjacent to the exhaust ports;

a main brick catalyst having a front face that includes a plurality of angled surfaces disposed downstream of said conically shaped catalyst.

12. The catalyst system as set forth in claim 11, wherein said main brick catalyst includes a surface substantially parallel to the exhaust gas flow through said main brick catalyst that interconnects at least two of said plurality of angled surfaces.

13. The catalyst system as set forth in claim 12, wherein said conically shaped catalyst includes a rear face that is substantially parallel to one of said plurality of angled surface of said main brick catalyst.

14. The catalyst system as set forth in claim 13, wherein at least one of said plurality of conically shaped catalyst is disposed adjacent to one of the exhaust ports of the engine.

15. The catalyst system as set forth in claim 11, wherein said conically shaped catalyst includes cells having a cross sectional area, said cross sectional area of at least one of said cells of said conically shaped catalyst increases in the downstream direction.

5

16. The catalyst system as set forth in claim 15, wherein said conically shaped catalyst includes a metallic substrate.

17. The catalyst system as set forth in claim 16, wherein said main catalyst brick includes cells of a constant cross sectional area.

10

18. The catalyst system as set forth in claim 17, wherein said main brick catalyst includes a ceramic substrate.

15

19. The catalyst system as set forth in claim 11, further comprising a shell enclosing said main brick catalyst and having a downstream end, said shell includes an exit portion having a diameter formed on said downstream end thereof, said exit portion decreases in diameter in the downstream direction.

20

25

20. The catalyst system as set forth in claim 19, wherein said main
brick catalyst includes a downstream end having a conically shaped
formation having a diameter, said diameter of said conically shaped
formation decreases in the downstream direction at a rate greater than the
rate at which said exit portion of said shell decreases in diameter in the
downstream direction.

21. A catalyst system for a motor vehicle having an engine with a plurality of exhaust ports that carry exhaust gases from the combustion chamber of the engine, the exhaust gases leave the combustion chamber and flow in a downstream direction by first entering the exhaust ports, said catalyst system comprising:

a plurality of conically shaped catalyst disposed adjacent to the plurality of exhaust ports, said conically shaped catalysts have a front face and a rear face, said rear face being larger than said front face, said conically shaped catalysts also include cells that vary in size, said cell size increasing in the downstream direction, said plurality of conically shaped catalysts include a metal substrate;

a shell that includes a plurality of tubes extending therefrom, said plurality of tubes receive said plurality of conically shaped catalysts, said shell includes an exit portion that decreases in diameter in the downstream direction;

a main brick catalyst disposed within said shell, said main brick catalyst is substantially cylindrical in shape and disposed downstream from said plurality of conically shaped catalysts, said main brick includes an angled front face and a downstream end, said downstream end has a conically shaped formation that decreases in diameter in the downstream direction at a rate greater than the rate at which said exit portion of said shell decreases in the downstream direction, said main catalyst brick includes a ceramic substrate; and

an exhaust pipe attached to said exit portion of said shell.

22. The catalyst system as set forth in claim 22, wherein said main brick catalyst includes a plurality of angled surfaces interconnected by at least one surface parallel to the exhaust gas flow through said main catalyst brick.

5

10

15

20

25

LIGHT-OFF AND CLOSE COUPLED CATALYST

ABSTRACT OF THE DISCLOSURE

5

A light-off and close coupled catalyst assembly for a motor vehicle is provided. The assembly includes a plurality of conically shaped catalysts disposed adjacent to the exhaust ports of a combustion engine. The assembly also includes a main brick catalyst disposed downstream of the conically shaped catalysts. The main brick catalyst includes an angled front face and a conically shaped downstream end.

10

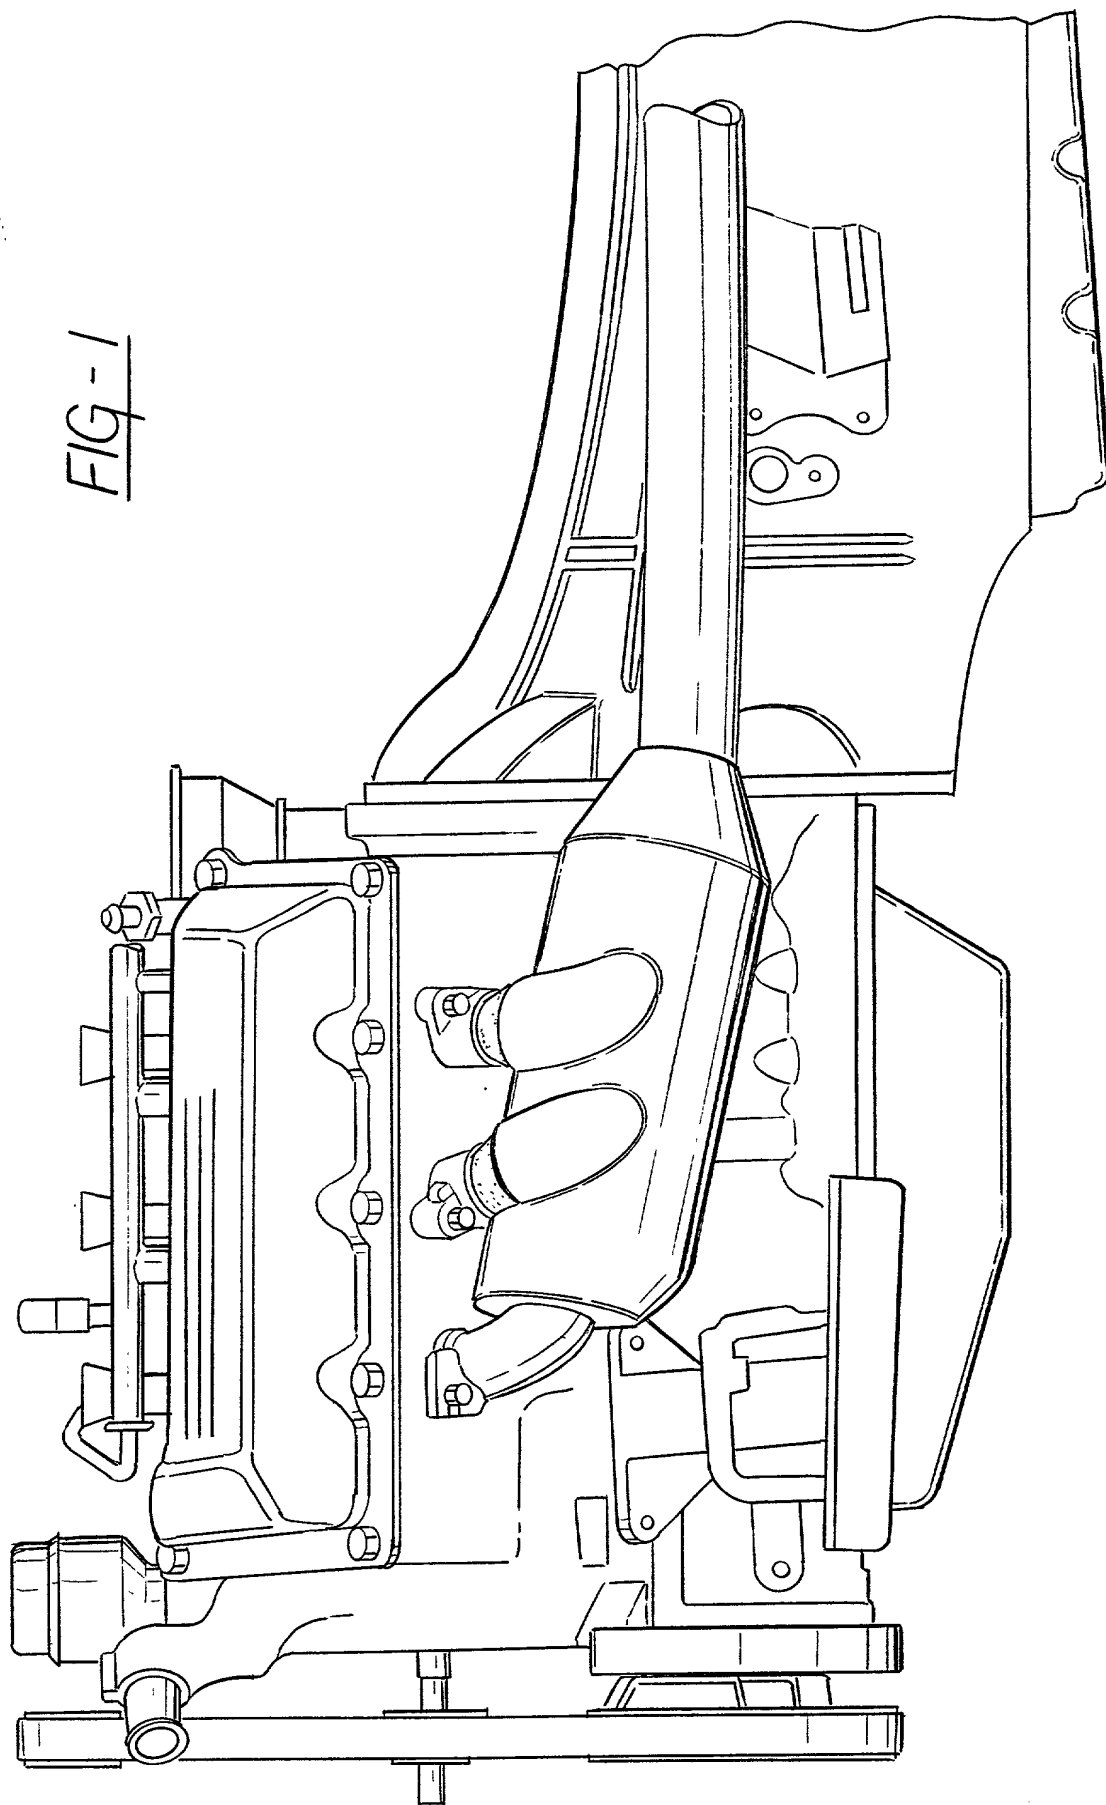


FIG - 1

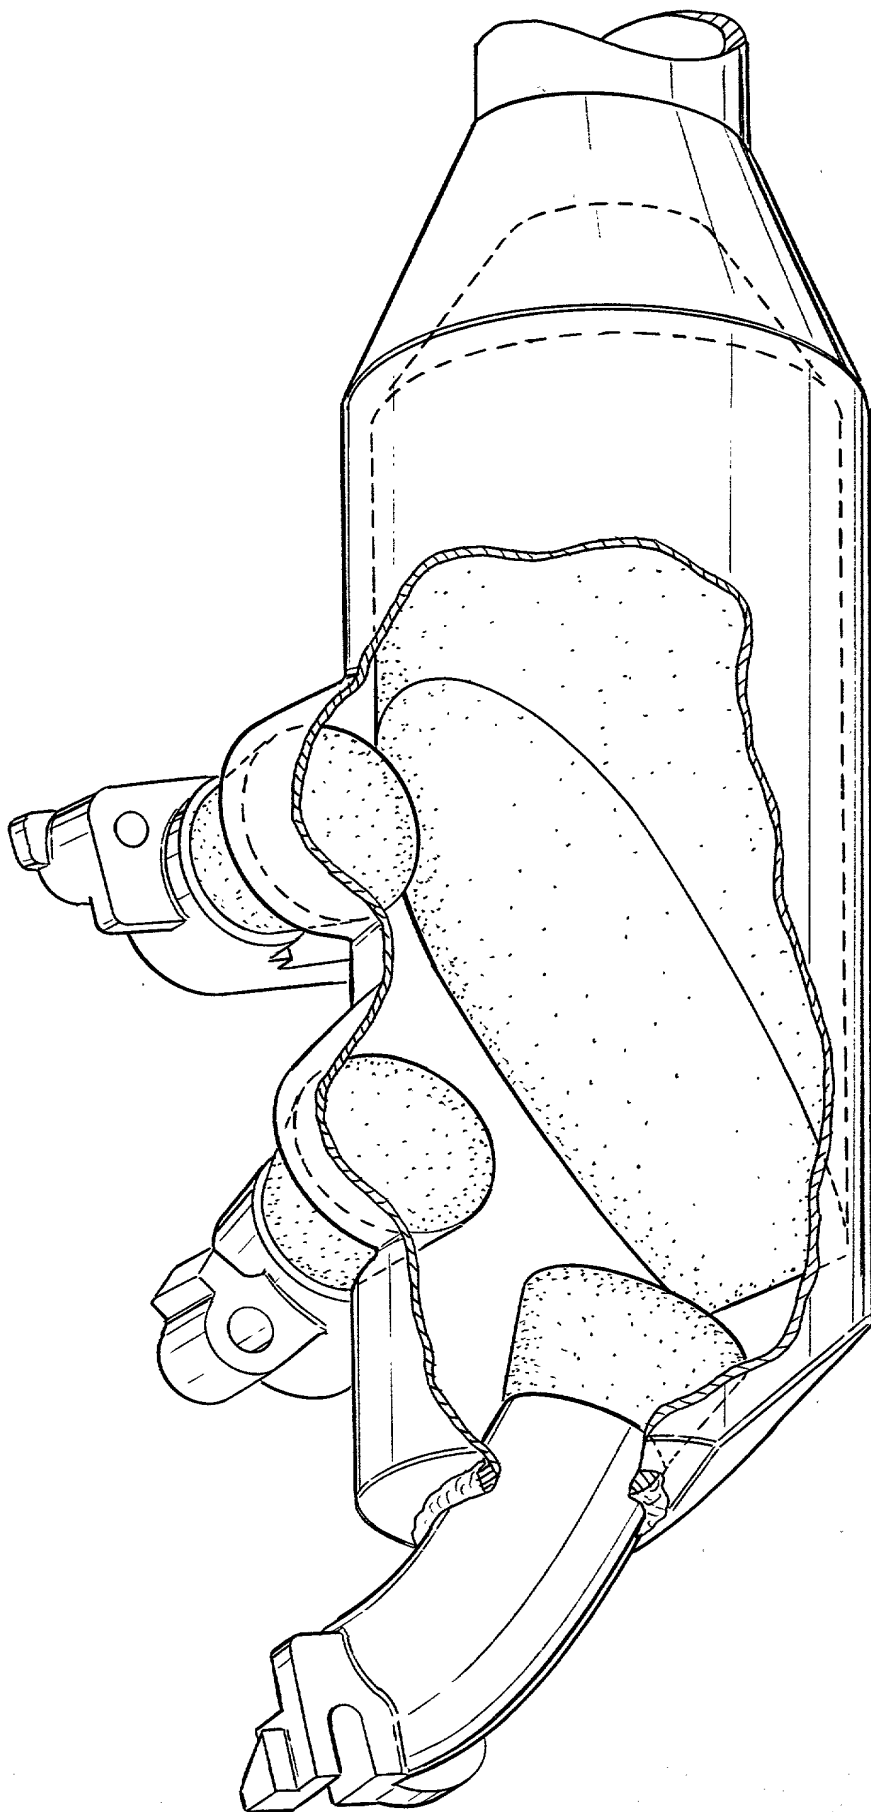


FIG-2

FIG - 3


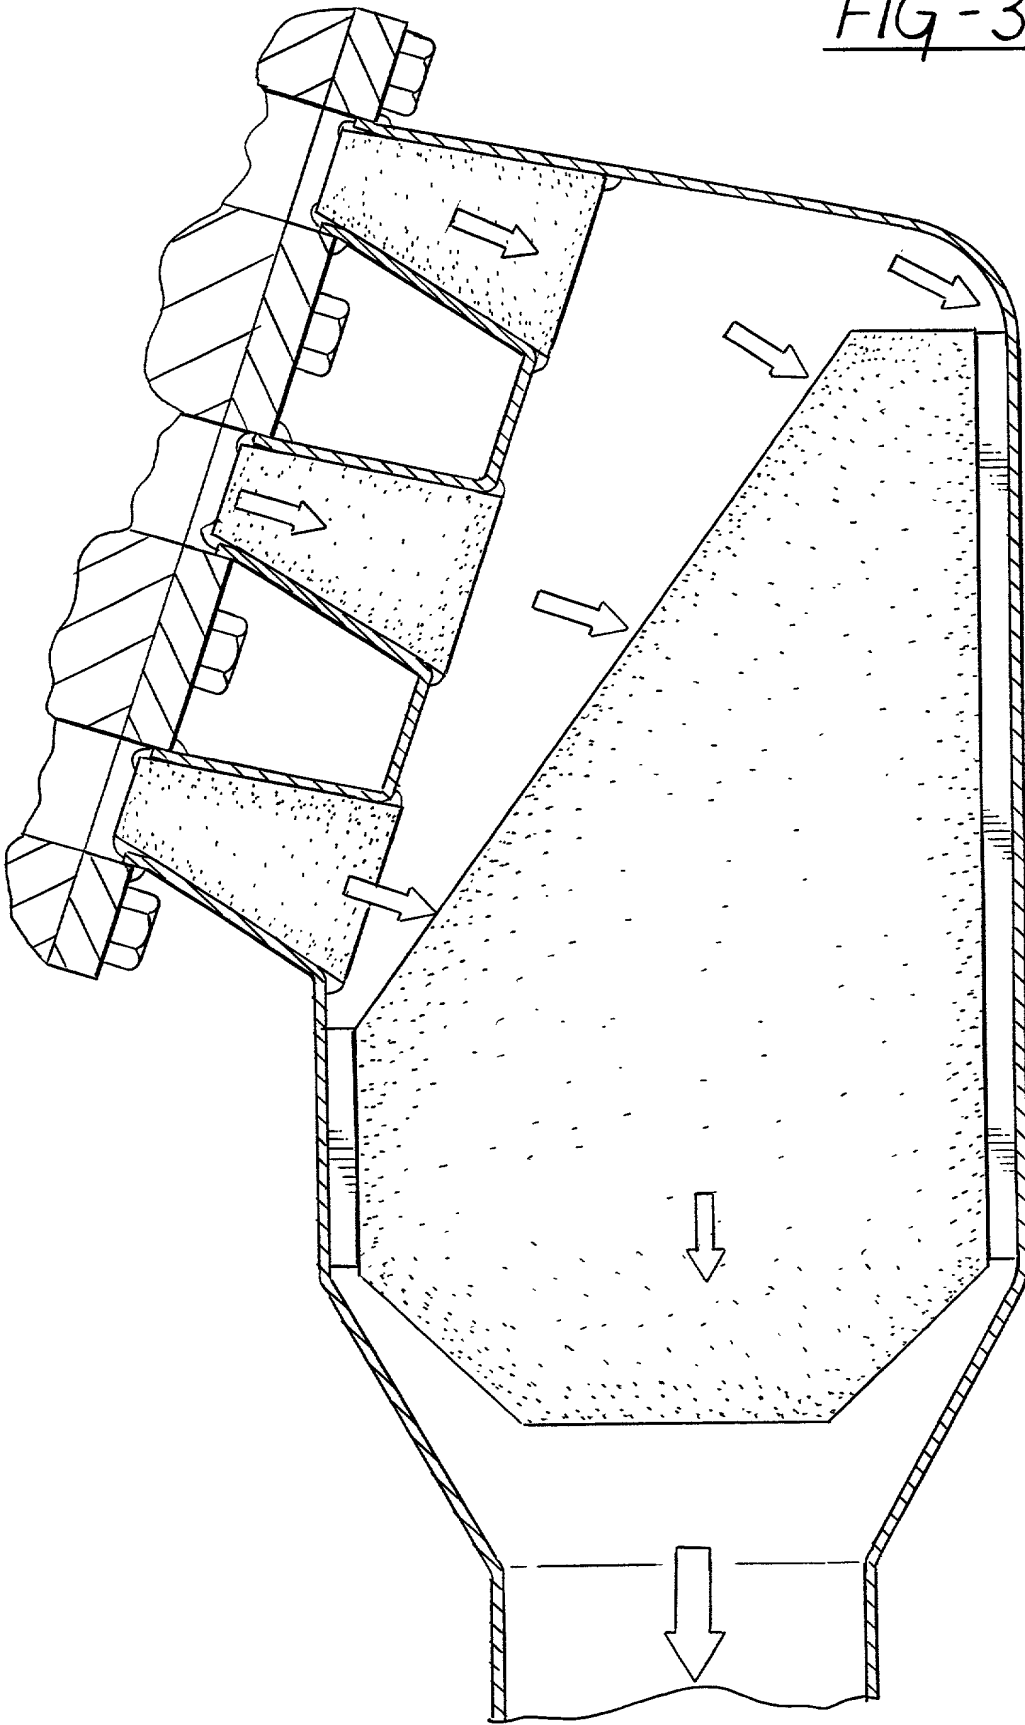


FIG -4

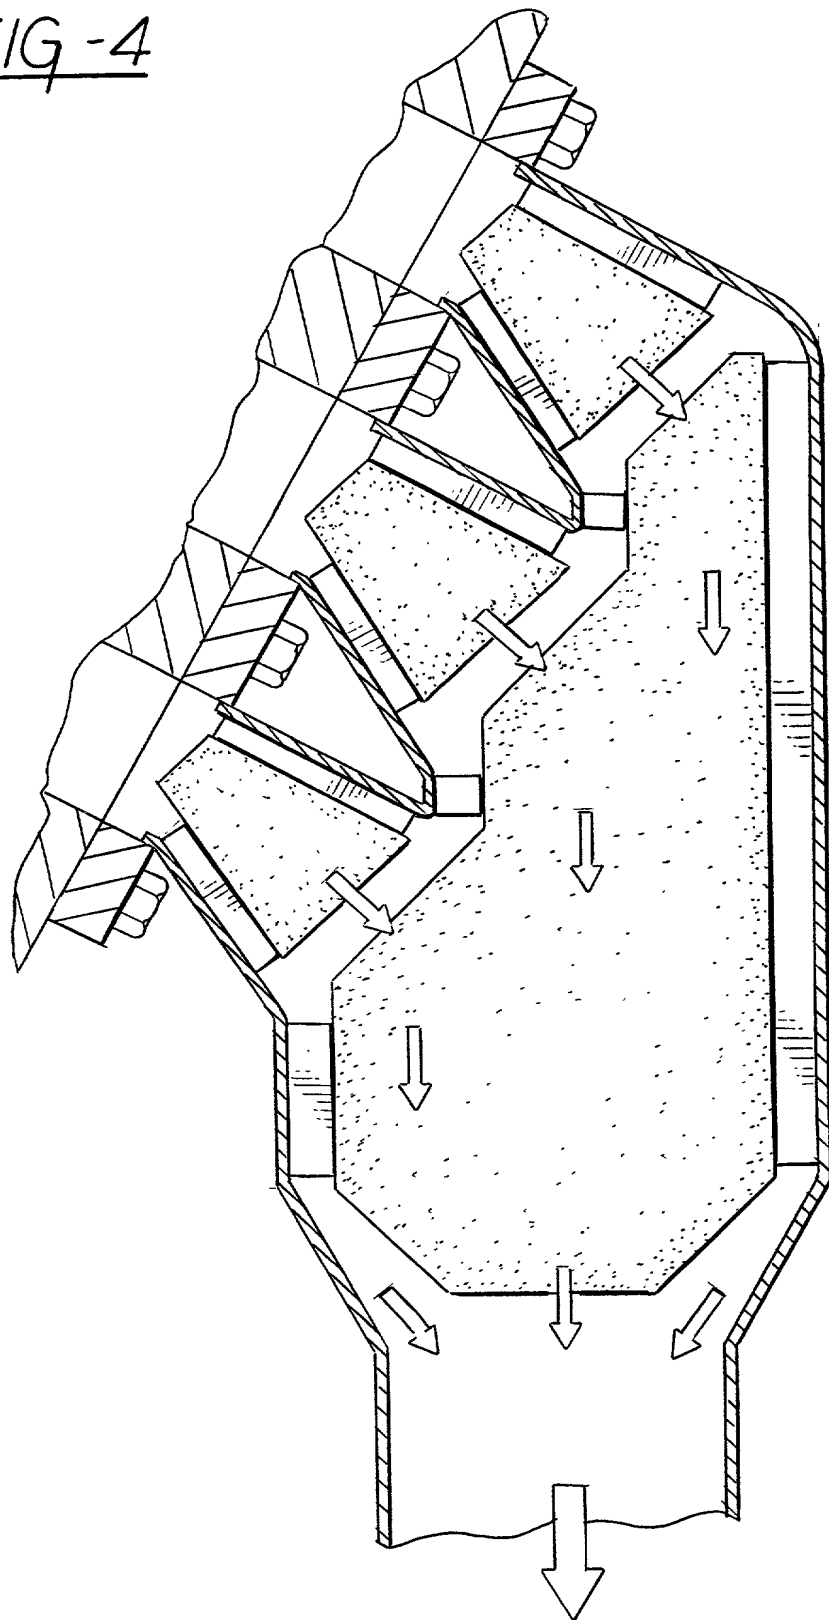

655T60" 69596E60

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As below named inventors, We hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names.

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

LIGHT-OFF AND CLOSE COUPLED CATALYST

the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Power of Attorney: As a named inventor, we hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Donna L. Berry,	Registration No. 36,451
Mark P. Calcaterra,	Registration No. 30,363
William J. Coughlin,	Registration No. 29,143
Marc Lorelli,	Registration No. 43,759
Kenneth H. MacLean,	Registration No. 25,236
Roland A. Fuller III,	Registration No. 31,160
Lawrence J. Shurupoff,	Registration No. 30,219
Jennifer M. Stec,	Registration No. 35,379
James R. Yee,	Registration No. 34,460

Send Correspondence to: Marc Lorelli, CIMS 483-02-19
DaimlerChrysler Intellectual Capital Corporation
800 Chrysler Drive East
Auburn Hills, Michigan 48326-2757

Direct telephone calls to: Marc Lorelli, (248) 576-5294

Full name of Inventor: Cornel Ivanescu

Inventor's Signature: Cornel Ivanescu Date: 9/10/99
Residence: 25595 Rouge River Drive, Dearborn Heights, MI 48127
Post Office Address: Same as above
Citizenship: United States

Full name of Inventor: Guy R. Desrochers

Inventor's Signature: Guy Desrochers Date: September 10, 1999
Residence: 716 Weybridge Drive, Bloomfield Hills, MI 48304
Post Office Address: Same as above
Citizenship: Canada

Full name of Inventor: Keith C. Ingermann

Inventor's Signature: Keith C. Ingermann Date: September 10, 1999
Residence: 5508 Fox Hunt Lane, West Bloomfield, MI 48322
Post Office Address: Same as above
Citizenship: United States

039595E60